


2J-NHM SWIVEL WITH ADJUSTABLE PACKING

PARTS LIST			
ITEM	PART NO.	QTY	DESCRIPTION
1	220001	1	SPINDLE
2	220002	1	BEARING HOUSING
3	220003	1	SPACER RING
4	220004	2	PACKING NUT
5	220005	1	BAIL
6	220128	1	O-RING 128
7	470565	1	GREASE SEAL
8	2207210	2	BEARING
9	105-009	1	GREASE FITTING
10	124-007	1	WASH PIPE </td
11	124-002	1	ADJUSTING NUT
12	124-003	1	SWIVEL HOUSING
13	2J-04NHM	1	WEAR BUSHING
14	2J-03NHM	2	PACKING RING
15	2J-07NHM	1	HOUSING SEAL
16	220001	1	SPINDLE
17	220223	1	223 O-RING
18	220227	1	227 O-RING
19	220008	1	ADJUSTING RING
20	220009	1	UNION CONNECTOR

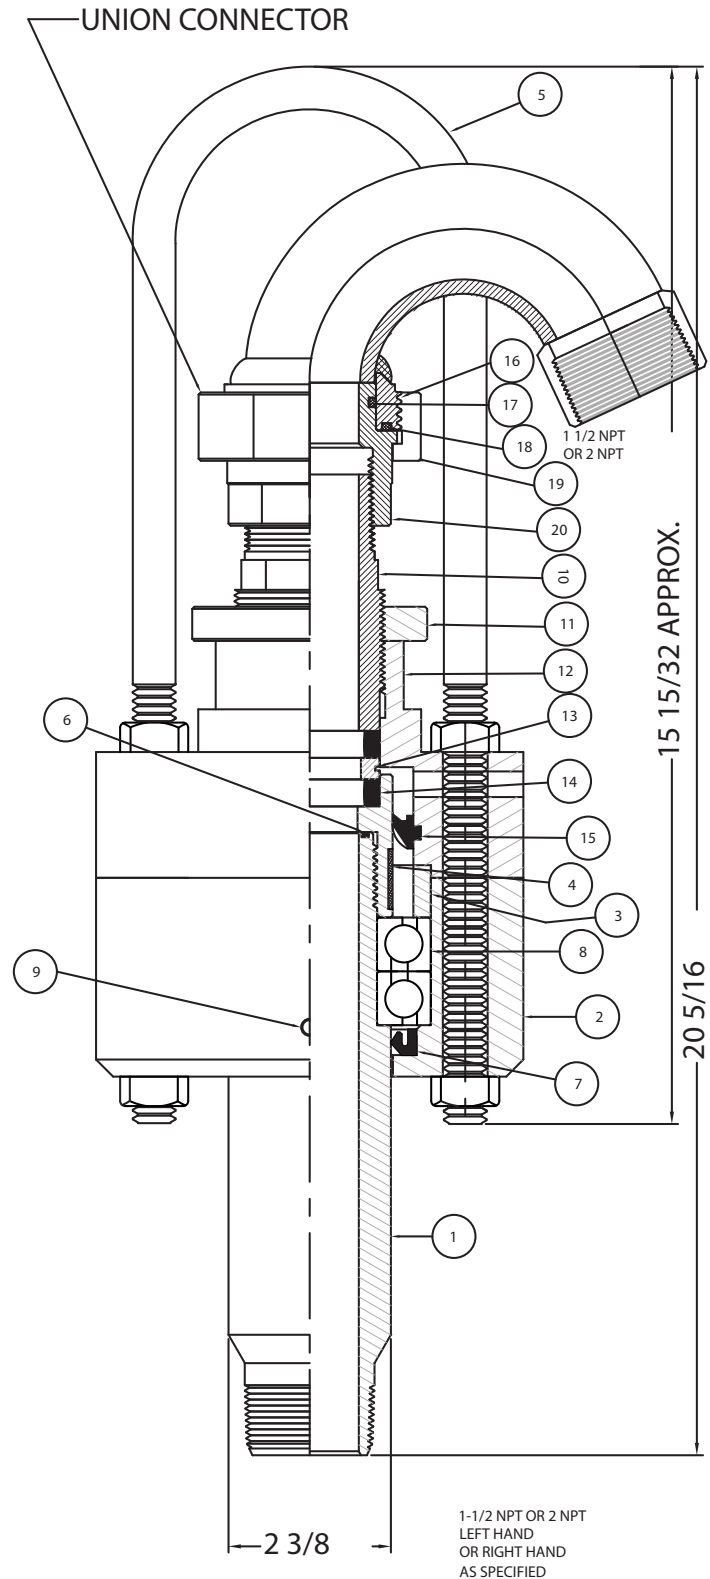

RECOMMENDED WORKING PRESSURE: 425 PSI

2J-NHM IS MADE FOR USE ON LIGHT HYDRAULIC RIGS AND SHOT HOLES IN JUNGLES AND SWAMPS. HOUSEHOLD WATER WELLS, AND ANY SMALL DRILLING RIGS.

THE 2J-NHM SWIVEL USES DUPLEX MOUNTED, ANGULAR CONTACT BEARINGS MOUNTED BACK TO BACK. THE BEARINGS ARE GREASE LUBRICATED FROM THE BOTTOM OF THE SWIVEL AND PUMPED UP THROUGH THE UPPER SEALS.

BEARINGS ARE RATED AT 5,870 LBS. AT 100 R.P.M. FOR 3,000 HOURS FULL LOAD.