


MODEL 5J-LP SWIVEL

FOR TOP HEAD DRIVES

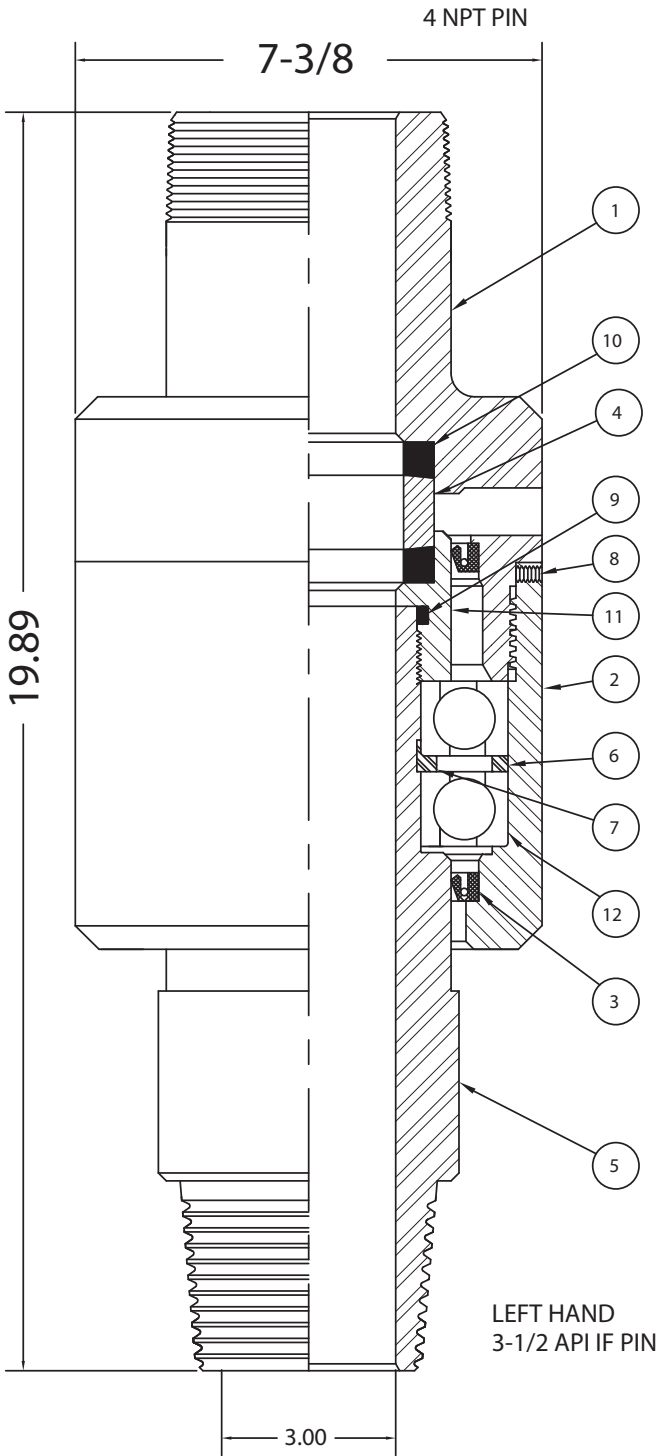

THE "J" SERIES OF SWIVELS ARE DESIGNED FOR MAXIMUM BORES FOR LARGE VOLUME OF AIR OR FLUID NEEDED ON TOP HEAD DRIVES.

PRECISION BEARINGS PROVIDE AMPLE THRUST AND LOAD CAPACITY AND ARE GREASE LUBRICATED.

SHOWN 3.0" ID
ALSO AVAILABLE 2, 2-1/2, 3, & 4" ID

WORKING PRESSURE STANDARD: 375 P.S.I.

SPECIAL PACKING AND SEALS AVAILABLE

PARTS LIST FOR 5J-LP SWIVEL			
SYM.	PART NO.	NO. REQUIRED	DESCRIPTION
1	139-101B	1 REQUIRED	GOOSENECK
2	139-102	1 REQUIRED	BEARING HOUSING
3	139-110	2 REQUIRED	GREASE SEAL
4	30XV-06NHM	1 REQUIRED	WEAR BUSHING
5	139-105B	1 REQUIRED	LOWER CONNECTION
6	139-107A	1 REQUIRED	BEARING SPACER
7	139-107	1 REQUIRED	BEARING RETAINER
8	SETSCREW	1 REQUIRED	1/4-20 X 3/8 SETSCREW
9	139-341	1 REQUIRED	O-RING PRP-568-341
10	30XV-05NHM	1 REQUIRED	PACKING RINGS
11	139-106	2 REQUIRED	PACKING NUT
12	139-7218	2 REQUIRED	BEARINGS 7218

WEIGHT: 84 LBS

ASSEMBLY 139-100B

ALL PARTS MADE IN U.S.A.